


CD206RSP

Rotation Shim Pair

Shims designed to adjust lateral or medial rotation
for Coyote[®] Dynamic Struts

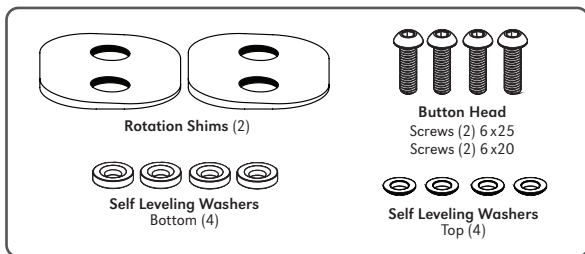

6 month warranty against manufacturer defects, excessive wear or breakage.
External Prosthetic Components



CD206RSP.Post.revA.06272024



Manufactured by Coyote[®]
419 N. Curtis Rd., Boise, Idaho 83706 USA
(208) 429-0026 | www.coyote.us



Advena Limited
Tower Business Centre
2nd Flr, Tower Street
Swatar, BKR 4013
Malta

Instructions

See Instruction example image on front. The Rotation Shim is designed for 2.5 degree lateral or medial rotational adjustments.

- 1 Install the shims between the AFO shell and the strut to adjust the foot shell or cuff's lateral or medial rotation.
- 2 The shims are not designed to be stacked.
- 3 Make sure the screws are all the way through all the threaded post holes and


not sticking out past the inside of the mounting plate.

- 4 Use the two piece adjustable washers and button head screws provided with the shims.
- 5 Make sure the large washers are flush and seat flat with the strut.
- 6 When all adjustments are made take the brace apart and Loctite® the threads with blue 242 Loctite®. Torque 5-8 Nm.
- 7 Tighten the screws after a couple weeks of use, also at follow up appointments, re-Loctite® if needed. Always torque 5-8 Nm.

⚠ ATTENTION

Always, *LOCTITE*® and torque to manufacturer specifications.

1. The instructions for this device cover a very specific method of fabrication, and we understand that a multitude of methods could be used. The fabricated device is the sole responsibility of the fabricator.
 2. Always use Loctite® Blue 242 on screw threads. Torque between 5 Nm and 8 Nm in even distribution.
 3. Tighten the screws after a couple weeks of use, also at follow up appointments, re-Loctite® if needed.
 4. Use the 6x18mm (top mounting plate) and 6x20mm (bottom mounting plate) screws provided with typical components for the (CD207XS, CD207XSS, CD207S, CD207SS) Use the 6x20mm (top mounting plate) and the 6x22mm (bottom mounting plate) screws provided with typical components for the (CD207M, CD207MS). Use the 6x22mm (top mounting plate) and 6x25mm (bottom mounting plate) screws provided with typical components for the (CD207R, CD207RS, CD207XR, CD207XRS).
- In atypical setups, longer screws may be needed. Always use screws class 10.9 or better. Make sure the screws are all the way through the threaded post holes and flush with the inside of the plate, longer screws may be needed depending on the strut and brace thickness. See example images full instruction booklet can be found online. A 6 month limited warranty applies to the Dynamic Strut AFO (CD207XS, CD207XSS, CD207S, CD207SS, CD207M, CD207MS, CD207R, CD207RS, CD207XR, CD207XRS) See instructions at www.coyote.us/instructions for more details.



See instructions online.

www.coyote.us/instructions-dynamicstrut

EN | Instructions for Use
DE | Gebrauchsanweisung
FR | Notice d'utilisation
ES | Instrucciones para el uso
IT | Istruzioni per l'uso
NO | Bruksanvisning
NL | Gebruiksaanwijzing
PT | Instruções de Utilização
PL | Instrukcja użytkowania
RU | Инструкция по использованию

CS | Návod k použití
JA | 取扱説明書
ZH | 中文说明书
KO | 사용 설명서
DA | Brugsanvisning
SV | Bruksanvisning
EL | Οδηγίες Χρήσης
FI | Käyttöohjeet
TR | Kullanım Talimatları

